



Medical

GM2000 High Capacity General Medical Waste Incineration solution.

Extra large top loading incinerator for secure disposal of sharps, general medical, clinical, and pathological waste.



The GM2000 is an extra large top loading incinerator. Designed for complete destruction of general medical waste. Manufactured to deliver optimum results through retaining maximum heat within the main chamber. Constructed with a multi layered 7.0" inch brick refractory placing our machines at the forefront of quality.

The GM2000 has a 147.62ft³ chamber volume, making it ideal for smaller hospitals and clinical practices. Utilising pulse firing burners, our GM range of incinerators are up to 40% more efficient than other machines, saving fuel and money. This machine is perfect for hospitals, clinical centres, and narcotics disposal.

Machine Specification

External L x W x H (inch)	172 x 137 x 82.5/157
Internal (at widest point)L x W x H (inch)	96 x 63 x 36
Chamber Volume (ft ³)	147.62
Weight (approx tonnes)	7
Max Load Capacity (lbs)	4400
Thermal Capacity (kW)	650
Power Supply 50/60 hz	110v-120v
Door Aperture (inch)	94 x 62
Control Panel	AI or PLC
Fuel Types	Diesel, LPG, N-Gas
Insulation Board (inch)	1" Superwool
Insulation Fire Brick	Grade E23
Fire Brick (Alumina)	42.5%

*We reserve the right to change the specification, dimensions and quality of materials from time to time, so long as the alteration is minor or an improvement to the said product.

Primary Chamber

- Pre-cast block impact zone protecting refractory lining during loading.
- Heavily insulated internal brick refractory, constructed along an interlocking systems to ensure maximum strength and resilience.
- Premium grade high alumina content refractory brick work delivering optimal thermal retention.
- Top loading counter balanced insulated access lid.
- Temperature controlled waste ignition burner automatic on-off, complete with internal air fans.

Secondary Chamber

- Fully insulated internal refractory lining. Constructed from high grade low thermal mass insulation.
- Temperature controlled Secondary chamber burnout burner with automatic on-off control, complete with internal air fans.
- Integrated combustion burner air fans automatically controlling distribution to designated areas.
- Temperature sensor mounting point at the top of the chamber, ensuring the chamber reaches the required 2012°F minimum, with a 2 second retention time.

Waste Type

	Clinical Waste	✓
	Treated Waste	✓
	Anatomical Waste	✓
	Cytotoxic & Cytostatic Waste	✓
	Offensive/Hygiene Waste	✓
	Medicinal Waste	✓
	Domestic (municipal) Waste	✓

Medical

GM2000 High Capacity General Medical Waste Incineration solution.

Waste Loading and De-Ashing

The GM range of incinerators are designed for top loading directly into the primary chamber. Loading can be manual or mechanically through digger or hydraulic bin tippler. To be loaded no more than once per day prior to operation. The incineration process will reduce the waste to approximately 3% volume, ash. The ash should be removed before the following waste is loaded to ensure optimum burn rates. Optional de-ashing doors are available.

The Addfield Difference

- Pre-Fabricated 0.3" inch robust mild steel casing, seam welded and suitably stiffened/ braced where necessary.
- Optimised loading chamber for maximum operational capacity.
- Lightweight resilient refractory fibre insulated lid, providing a tight seal, giving excellent thermal efficiency.
- Counterweighted loading chamber lid for ease of use.
- Primary chamber lining thickness 7.0" inch rated up-to 3002°F
- Premium paint finish - Steel structures are painted using a two pack high grade paint system.
- Multi-layered refractory lining using fire bricks and insulation bricks, improving thermal efficiency.



Additional Operation Equipment



Bin Tipper

The Bin Tipper unit empties waste within the bin using a unique electro-hydraulic mechanism that can lift and tip more than 330.6 lbs. Hands free loading ensures operators safety, when dealing with hazardous waste.




Fuel Tank

Allowing you to operate the incinerator in all locations as well as providing a backup to your traditional supply. Available in 219.9 to 1099.8 gallon capacity. Fuel can be safely stored and monitored in close proximity to your incinerator.



Venturi System

The Venturi is an advanced flue gas treatment system designed to further reduce dust, acid gasses, dioxins and furans. Highly effective, the venturi is widely regarded as the leading treatment system in its field.

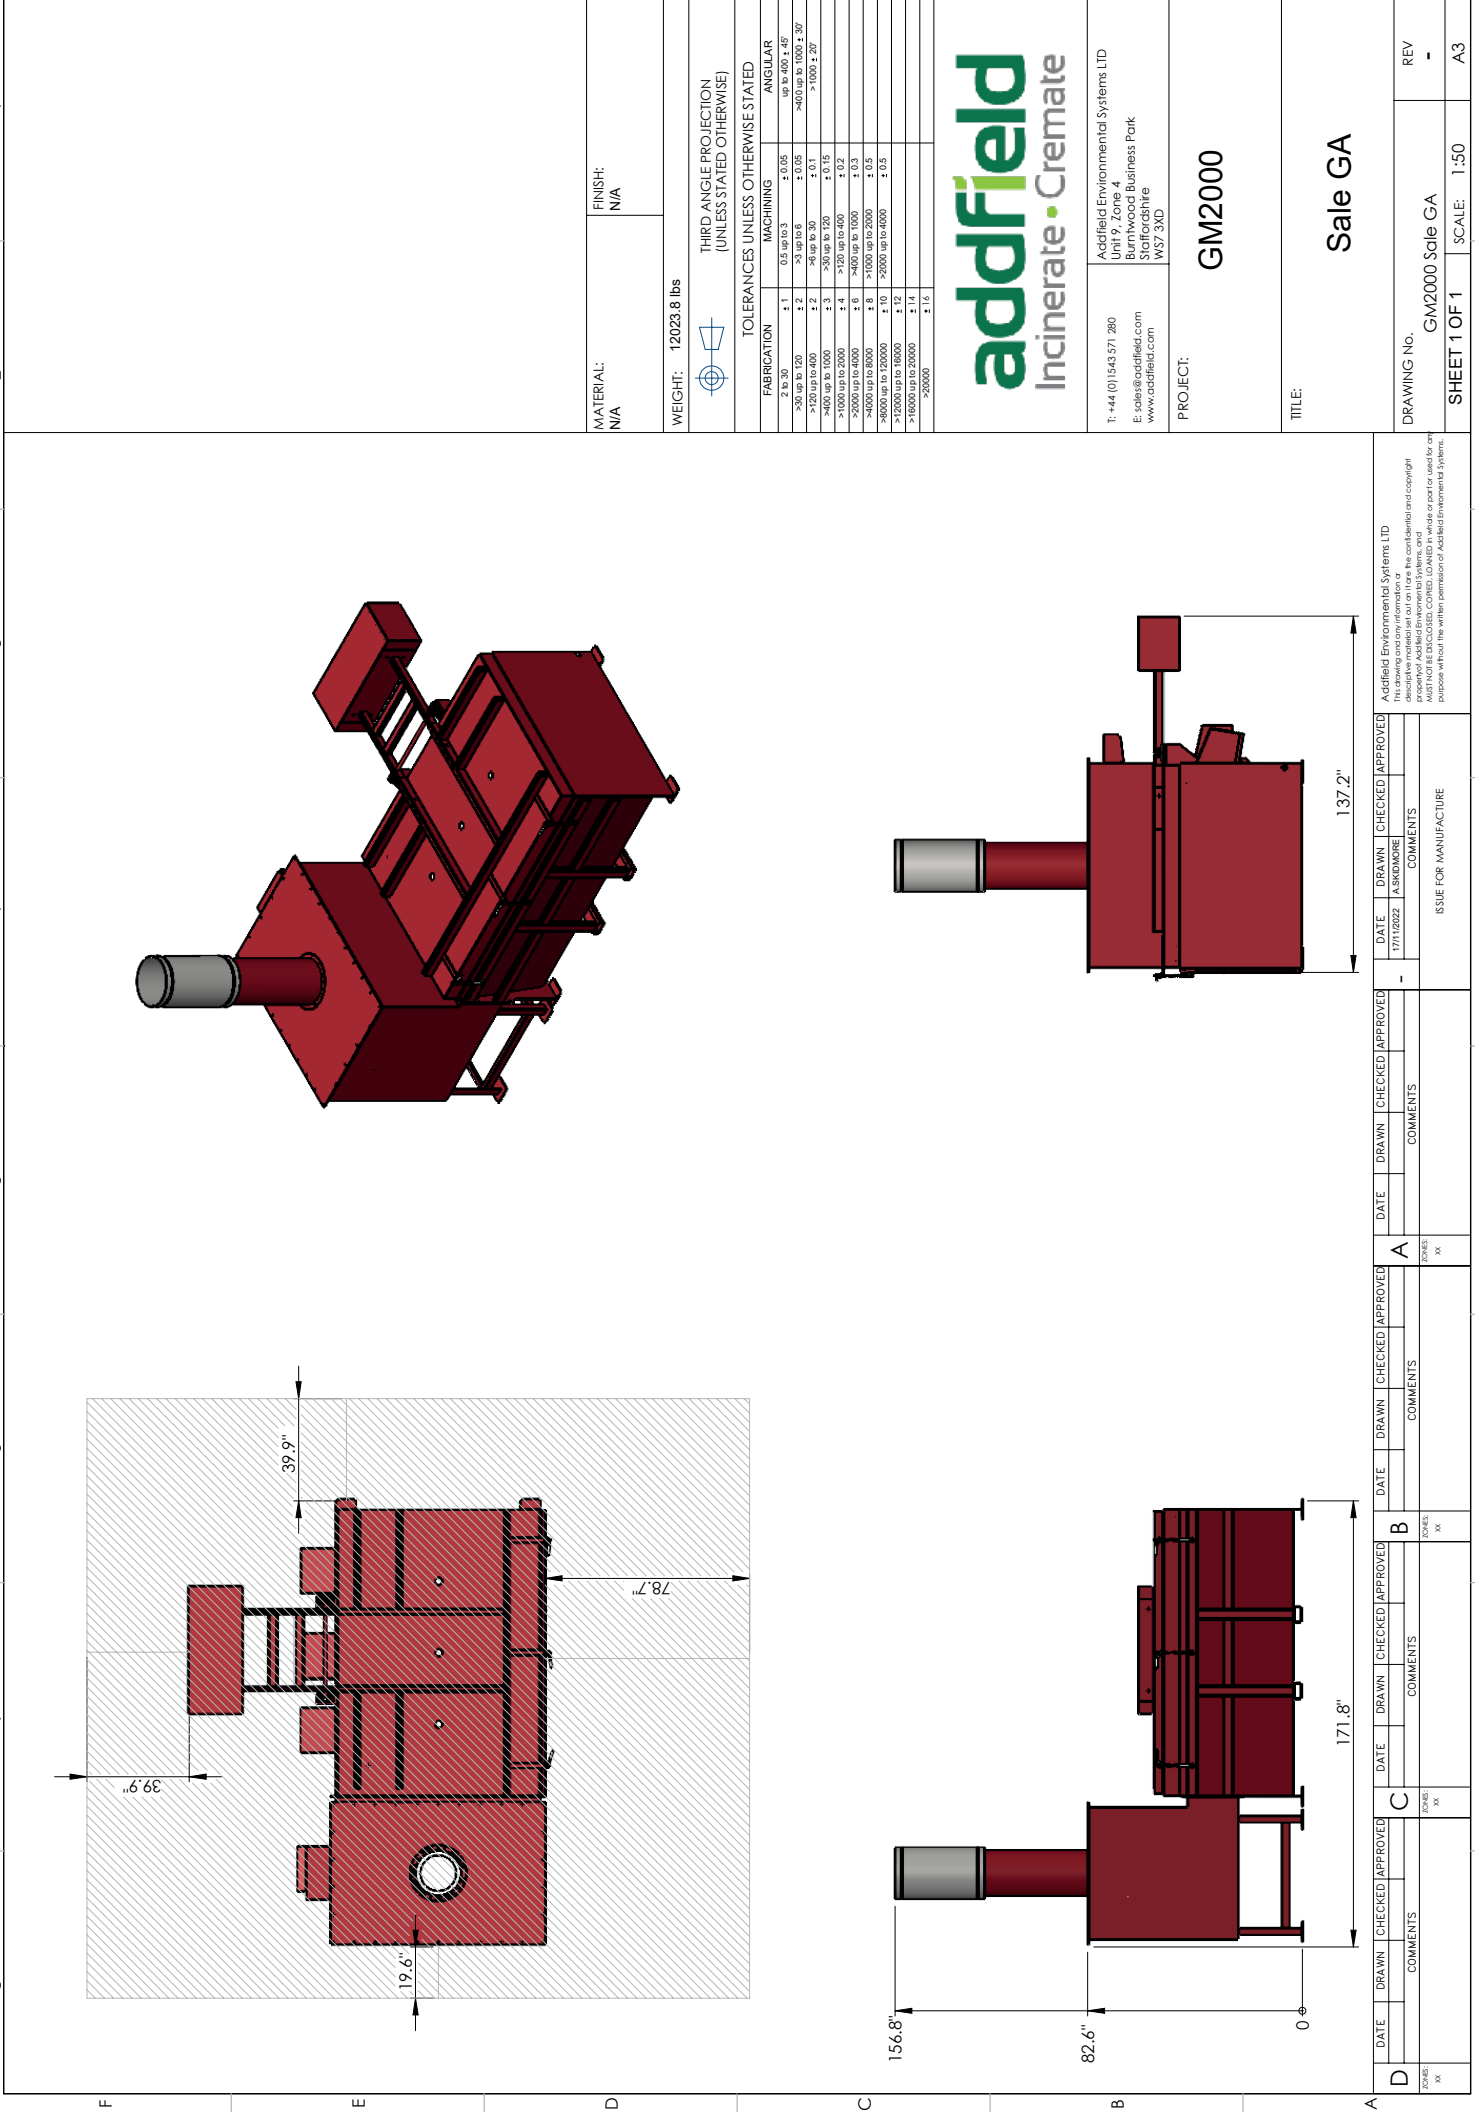

MATERIAL: N/A		FINISH: N/A
WEIGHT: 12023.8 lbs		
THIRD ANGLE PROJECTION (UNLESS STATED OTHERWISE)		
TOLERANCES UNLESS OTHERWISE STATED		
FABRICATION	MACHINING	ANGULAR
2 to 30	± 1.1	0.5 up to 3
30 up to 120	± 2	>3 up to 6
120 up to 400	± 2	>6 up to 30
400 up to 1000	± 3	>30 up to 120
1000 up to 2000	± 4	>120 up to 400
2000 up to 4000	± 6	>400 up to 1000
4000 up to 8000	± 8	>1000 up to 2000
8000 up to 12000	± 10	>2000 up to 4000
12000 up to 16000	± 12	>4000 up to 8000
16000 up to 20000	± 14	>8000 up to 16000
>20000	± 1.6	>20000

T: +44 (0)1543 571 280 E: sales@addfield.com www.addfield.com		Addfield Environmental Systems LTD Unit 19, Zone 4 Burnwood Business Park Staffordshire WS7 3XD
PROJECT: GM2000		
TITLE: Sale GA		
DRAWING No. GM2000 Sale GA	REV -	
SHEET 1 OF 1	SCALE: 1:50	A3